

SINGLE INLET BOTTLED WATER SYSTEM



Model Shown BW1000A

FLOJET Single Inlet BW Series

At just 6" x 8" the Flojet Single Inlet Bottled Water Dispensing System is the most compact system you can buy and it's the most affordable.

- Float Switch for Automatic Shut-Off.
- Built-in Check Valve.
- Universal Seal Cap.
- Easy Mounting.
- Upgrade Kits are Available.




Appliance Controller Interface.
Model shown BW1510A




FLOJET[®]

TYPICAL INSTALLATIONS


**Kitchen / Refrigerator
with Single Inlet
BW System**

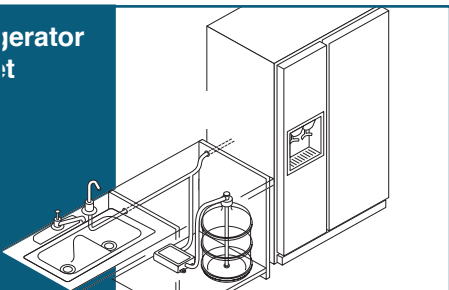

**Coffee Cart / Kiosk
with Single Inlet
BW system**



**Coffee Cart / Kiosk
with Dual Inlet BW
System and
Appliance Controller**

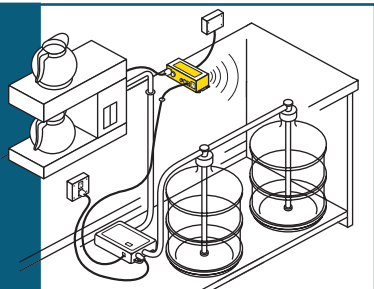

For more information on Flojet Appliance Controller, please reference form# F100-405 and form# F100-406 for the Dual Inlet system.

KITS

- Dual inlet suction kits (convert single inlet to dual inlet)
PN# 21000633A
- Appliance Controller Interface kit (convert legacy models to A.C. Interface configuration) PN# 91006466A
- Single inlet suction hose replacement kit PN# 21000006B
- Appliance Controller PN# 91006467A
- Optional daisy chain (multi-hook up) 4-6 pin RJ-11 9' cable
PN# 91006698A

SPECIFICATIONS

Voltage	115 VAC & 230 VAC, 12 VDC
Cycles	50/60 Hz. for AC Models
Current	
115 VAC	0.50 Amps. Max.
230 VAC	0.25 Amps. Max.
12 VDC	3.0 Amps. Max.
Maximum Flow	1.0 GPM (3.8 l/min.)
Maximum Pressure	40 PSI (2.8 bar)
Housing Material	ABS
Shipping Weight	6.4 Lbs. (2.9 kg)

DIMENSIONS

Control Box	3.0 in. H x 5.5 in. W x 7.5 in. D (76.0 mm x 140.0 mm x 190.0 mm)
--------------------	--

MODEL NUMBERS

Single inlet		
BW1000A	115 VAC	3.5 ft. (1 m) cord with plug
BW2000A	230 VAC	3.5 ft. (1 m) cord stripped
BW3000A	12 VDC	12 in. (30 cm) lead wires
Dual Inlet		
BW1020A	115 VAC	3.5 ft. (1 m) cord with plug
BW2020A	230 VAC	3.5 ft. (1 m) cord stripped
BW3020A	12 VDC	12 in. (30 cm) lead wires
Dual Inlet with Appliance Controller Interface		
BW1520A	115 VAC	3.5 ft. (1 m) cord with plug
BW2520A	230 VAC	3.5 ft. (1 m) cord stripped
BW3520A	12 VDC	12 in. (30 cm) lead wires

SPECIAL FEATURES

- Float switch for automatic shut-off
- Built-in check valve to prevent back flow
- Universal seal cap fits most water containers
- Easy Installation
- 20' (6.1m) 0.250" (0.5cm) OD discharge hose included